



Linear Drive System For Laser Cutting Industry



Performance

	Ratio ⁽¹⁾	5		7	
		Pinion Module No.	2		
Pinion Teeth No.		33	37	33	37
Nominal Output Torque T_{2N}	Nm	165		130	
Max. Acceleration Torque T_{2B}	Nm	247.5		195	
Emergency Stop Torque T_{2NOT}	Nm	495		390	
Max. Drive Force F_{2T}	N	6913	6172	5447	4863
No Load Running Torque	Nm	0.7			
Backlash ⁽²⁾	arcmin	≤ 3			
Torsional Rigidity	Nm/arcmin	22			
Nominal Input Speed n_{1N}	rpm	3,600			
Max. Input Speed n_{1B}	rpm	6,000			
Max. Drive Speed V_{Max}	m/s	4.4	3.1	4.9	3.5
Service Life ⁽³⁾	hr	20,000			
Operating Temp.	°C	-10° C ~ 90° C			
Lubrication		Synthetic Lubrication Grease			
Mounting Position		All Directions			
Running Noise ⁽⁴⁾	dB(A)	≤ 59			
Efficiency η	%	$\geq 97\%$			
Inertia	kg.cm ²	4.52			

Order Code

L - 24 - 5 - 33

Teeth No. 33T / 37T

Ratio R5 / R7

Motor Shaft⁽⁵⁾ 19 / 22 / 24

(1) Ratio ($i = N_{in} / N_{out}$)

(2) Backlash is measured at 2% of Nominal Output Torque T_{2N}

(3) Continuous operation is not recommended

(4) These values are measured by gearbox with ratio 7 at 3,000 rpm without loading

(5) Motor adapter specification please refer to the dimension of linear drive system



APEX DYNAMICS, INC.


No.10, Keyuan 3rd Rd., Xitun Dist., Taichung City 407, Taiwan (R.O.C.)

Tel:886-4-24650219 | Fax:886-4-24650118

sales@apexdyna.com | <http://www.apexdyna.com>

APEX-2019-10-L24 Series-1.0En-TWN

Selection of the optimum gearbox

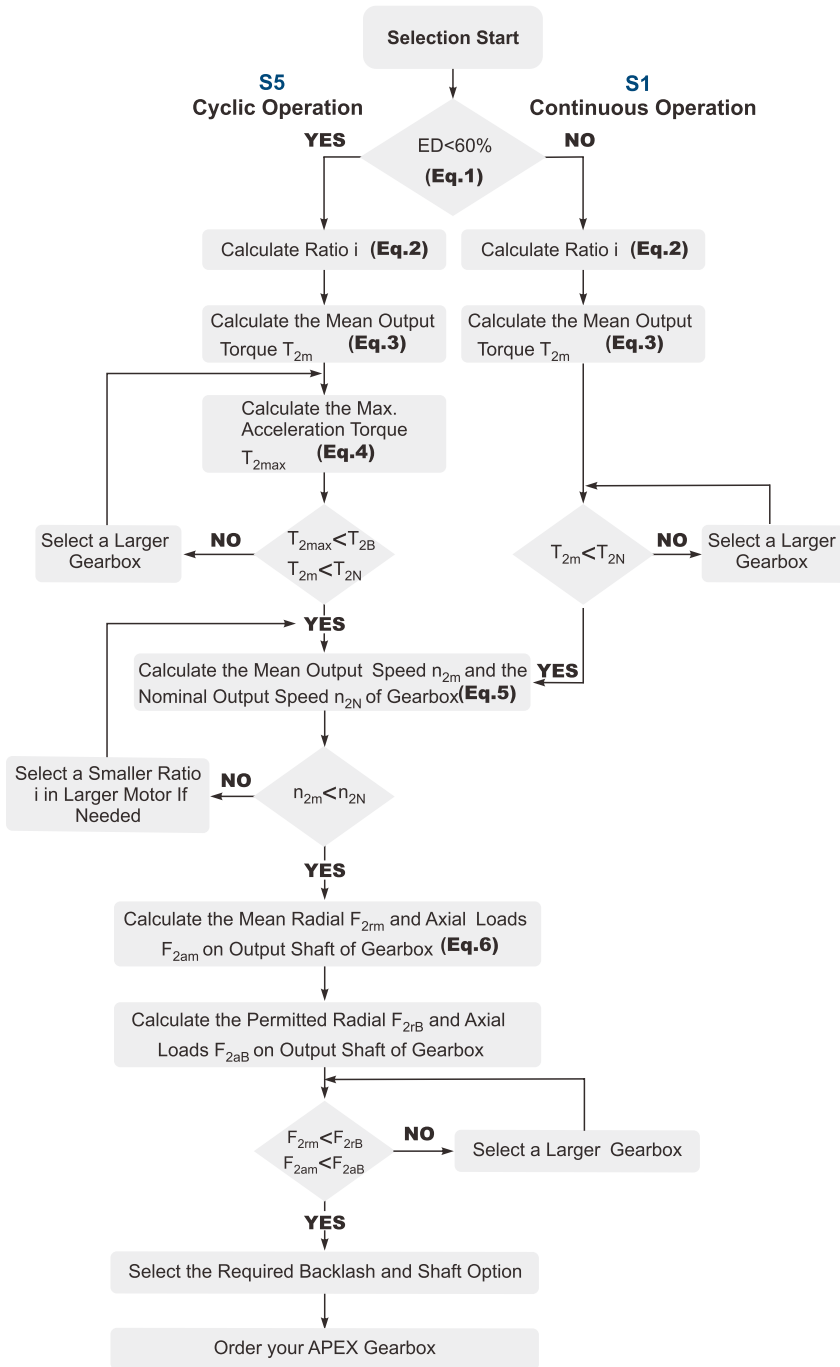

Recommended (for S5 Cycle Operation)

The general design is given for


$$\frac{J_L}{i^2} \leq 4 \times J_m$$

The optimal design is given for

$$\frac{J_L}{i^2} \cong J_m$$

J_L Load Inertia

J_m Motor Inertia

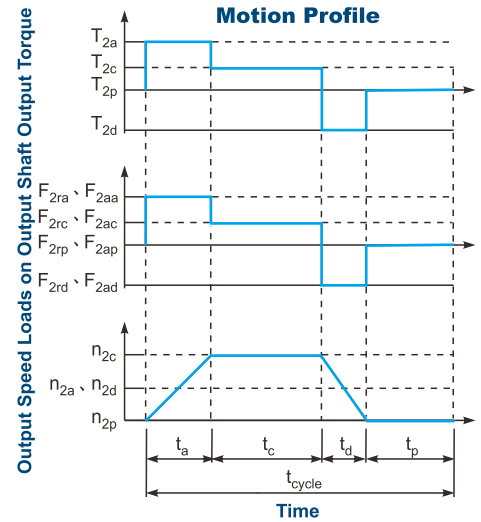

$$1. ED = \frac{t_a + t_c + t_d}{t_{cycle}} \times 100\%$$

Index : a. Acceleration, c. Constant,
d. Deceleration, p. Pause

(Eq.1)

$$2. i \cong \frac{n_m}{n_{work}}$$

n_m Output Speed of the Motor

n_{work} Working Speed

(Eq.2)

$$3. T_{2m} = 3 \sqrt{\frac{n_{2a} \times t_a \times T_{2a}^3 + n_{2c} \times t_c \times T_{2c}^3 + n_{2d} \times t_d \times T_{2d}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

(Eq.3)

$$4. T_{2max} = T_{mB} \times i \times K_s \times \eta$$

where K_s is

K_s	No. of Cycles / hr
1.0	0 ~ 1,000
1.1	1,000 ~ 1,500
1.3	1,500 ~ 2,000
1.6	2,000 ~ 3,000
1.8	3,000 ~ 5,000

T_{mB} Max. Output Torque of the Motor

η Efficiency of the Gearbox

(Eq.4)

$$5. n_{2a} = n_{2d} = \frac{1}{2} \times n_{2c}$$

$$n_{2m} = \frac{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}{t_a + t_c + t_d}$$

$$n_{2N} = \frac{n_{1N}}{i}$$

(Eq.5)

$$6. F_{2rm} = 3 \sqrt{\frac{n_{2a} \times t_a \times F_{2ra}^3 + n_{2c} \times t_c \times F_{2rc}^3 + n_{2d} \times t_d \times F_{2rd}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

$$F_{2am} = 3 \sqrt{\frac{n_{2a} \times t_a \times F_{2aa}^3 + n_{2c} \times t_c \times F_{2ac}^3 + n_{2d} \times t_d \times F_{2ad}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

(Eq.6)